

E1065

high connectivity weight transmitter

Description

General

This specification describes the E1065 high connectivity weight transmitter indicator, capable of stand-alone operation, or of integration into a larger system via serial, FieldBus and Ethernet interfaces.

It is a panel-mounted, microprocessor-based industrial weighing system with up to 100,000 displayed increments for analysing, displaying, storing and transmitting gross and net weight information.

Up to eight analogue load cells to be connected with the indicator. The E1065 can be matched to almost any load cell system to achieve optimum accuracy, stability and repeatability.

The indicator can control its surrounding process using configurable I/O. Alternatively control can be executed from a central system using an extensive range of available interfaces.

Configurable Features

The E1065 features a keyboard which allows any of the following functions to be configured during commissioning:

- Sensitivity to weight signal
- Scale capacity
- Number of divisions and increment size
- Weighing Unit
- Zero / back balance
- Decimal marker type - point or comma
- Position of decimal marker
- Filtering parameters
- Five points for linearity correction to ensure maximum accuracy
- Tare availability
- Time and date
- User-definable serial output strings
- Grand total information
- Scale ID number

- I/O operation

All these characteristics are stored in non-volatile memory so that once the ideal parameters for any given weighing system are established they can be retained with certainty for the future.

Once the scale is set up as required, a calibration report can be printed showing weighing details (useful for the installation engineer). This allows the state of the system to be monitored.

One PLU is provided for simple totalising and storage of user-defined parameters.



Applications

Parts Counting

Sampling modes supported: fast; dribble; bulk.

Static Checkweighing

Set limits, manually or by sample mode.

Peak Hold

Records maximum weight measured. Clear button resets memory.

Recipe/Filling

Control of complete process using configurable trips. In-flight compensation may be set to optimise the process. Batching mode allows repetition of the process for a defined quantity.

Totalising Against Dedicated Product Look Ups (PLU)

Link weighings to PLUs for complete stock control.

Remote Display Mode

Connect to, or use as a remote display.

Specification

Electrical

Display

Type

Green LED 20 mm
Displays up to six digits

Decimal Points

Configurable to any of six positions.

Units Displayed

kg, lb, custom.

Annunciators

Balance (Gross Zero)
Motion
Gross
Tare
Pre-set Tare
Net
lb, kg, custom
Under/Target/Over
Print
Three Trip Outputs

Keypad

7 keys, addressing:
Numeric Entry,
One Function Key,
Dedicated Function Keys:
Zero, Tare, Select, Print, Units,
Standby.

Load Cell Input

Maximum Load Cells if 350Ω
Eight

Connection of Input

Direct wired.

Excitation

Direct current

Voltage

± 5V dc

Current

Up to 230 mA

Remote Sense

Obtained from excitation, or linked directly to reference input connectors at the indicator

µV/ per Division

1.6

Resolution

Non- Approved 100,000.
Approved 10,000.

Calibration

Full digital multi-point (five point) calibration.

Theoretical calibration possible if parameters known.

Provides over load report.

Increment Multiplier

1, 2, 5, 10, 20, 50

AVR

Two Stage

Analogue to Digital Convertor

Display Update Rate

1, 2, 5, 10 per second.

A to D Rate

100 per second.

A to D Type

Delta Sigma.

Filter

Harmonizer Digital Filter

Three Programmable Parameters:

Samples to Average - sets number of A-D conversions which will be averaged to give a weight reading.

IIR Filter - Sets how much damping the harmonizer applies to the weight reading. Typically between 1 (low) - 8 (higher).

Threshold Level - set the minimum weight change (in calibration units) which the harmonizer will not attempt to filter out as noise.

Balance/Zero

Setting

Keyboard push button.

Size of Balance Range

Normally 10%, up to 100%.

Zero Indication

Within 2% of maximum capacity.

Under Range Indication

Displays " _ _ _ _ _ "

Zero Tracking

Configurable.

Motion Detection

Configurable.

Range/Span

Range of Adjustment
0 - 100,000 divisions

Over Range Indication
Displays “-----”

Tares

Push-Button (Semi Auto) Tare
Push-button operated, semi-automatic, with selectable negative weight display. Cumulative taring is possible.

Initialisation and Operation
When the item to tare on is applied, press the ‘Tare’ push-button.

Indication
‘Net’ annunciator is illuminated.

Trips

The indicator has three internal sequencing trips as standard, logic level rated.

Using the external TIU3, these will switch mains voltage (240 V 10 A). Internal inputs are rated at logic levels.

The trips can be set to activate an output based on a given target:-

- Target Weight
- Time
- Number of counts from a pulse counter

All configuration information is retained when power is off.

Product Look Ups (PLUs) & Totals

Information Stored per PLU
Grand Totals.

Maximum Capacity of PLU
999,999.

Real Time Clock

The E1065 is fitted with a real time clock which allows the user to display and print the time and date. This clock is battery-backed and will remain functional in the absence of mains power.

Communications

Serial Interface
Two bi-directional asynchronous serial interfaces (RS232/485/422 and RS232/20mA current loop) as standard.

Networking
Ethernet 10/100 TCP/IP interface as standard

FieldBus interfaces - standard:

- DeviceNet
- ModBus
- ProfiBus DP
- Ethernet IP

ControlNet is optional – see Kits.

Electrical Power Input

Voltage
100 VAC - 230 VAC nominal, 50/60 Hz.

Tolerance
Voltage -15 to +10%
Frequency ±10%.

Power Consumption
25 VA maximum when used with full configuration of load cells

Cable length
2 m.

Power Supply
Internally fitted, switched mode.

Isolation Protection
None. Mains earth lead must be connected to safety earth.

Environment

Resistance to Dirt and Moisture
Protected to IP54, in ABS plastic enclosure.

Electrical Disturbance
Immune to electrical disturbance, including RFI as detailed in EN 45501:1992.

Operating Temperature
-10° C to + 40° C

Service Temperature
-10° C to + 55° C

Storage Temperature
-40° C to +70° C

Finish

Enclosed in moulded ABS plastic case.

Mounting Options

The indicator is designed to panel mount.

Performance

Internal Resolution
16,777,216

Self Diagnostics
Display
Keys
A2D
Serial Test (2)
Internal I/O
External I/O

Approvals

All data relating to the performance of the machine meets and exceeds requirements of EN 45501:1992 European Approval (‘E’ Approval) Accuracy Class III Machines and OIML 76-1. The type approval certificate numbers being:

| | |
|--------------|----------|
| EU | - UK2722 |
| South Africa | - |
| New Zealand | - |
| Australia | - |
| OIML | - |
| NTEP | - 04-031 |

Factory Options

Choice of mains power connector:
UK, Euro, Australian, South
African, American.

Kits

The following kits are available to
enable local configuration when
required.

1. Analogue Output/Pulse Input/TIU Comms Card

Provides single analogue output
4-20 mA, pulse input and
communications for TIU3.
E10650G00000000

2. ControlNet Interface Kit

Enables interfacing to ControlNet
network.
E10650K00000000

3. Load Cell Connector with Internal Loom

When fitted, provides ability to
disconnect loadcell inputs from
indicator without opening the unit.
70735-247

Accessories

1. Trips Interface Unit (TIU3)

Provides three external mains
rated outputs in place of three
internal logic level I/O included as
standard. Requires Analogue
Output/Pulse Input/TIU Comms
Card.
E10100E00000000


2. Interface Leads for Platform to Indicator

See price list.

3. Interface Leads for Indicator to Printer

See price list.

Dimensions

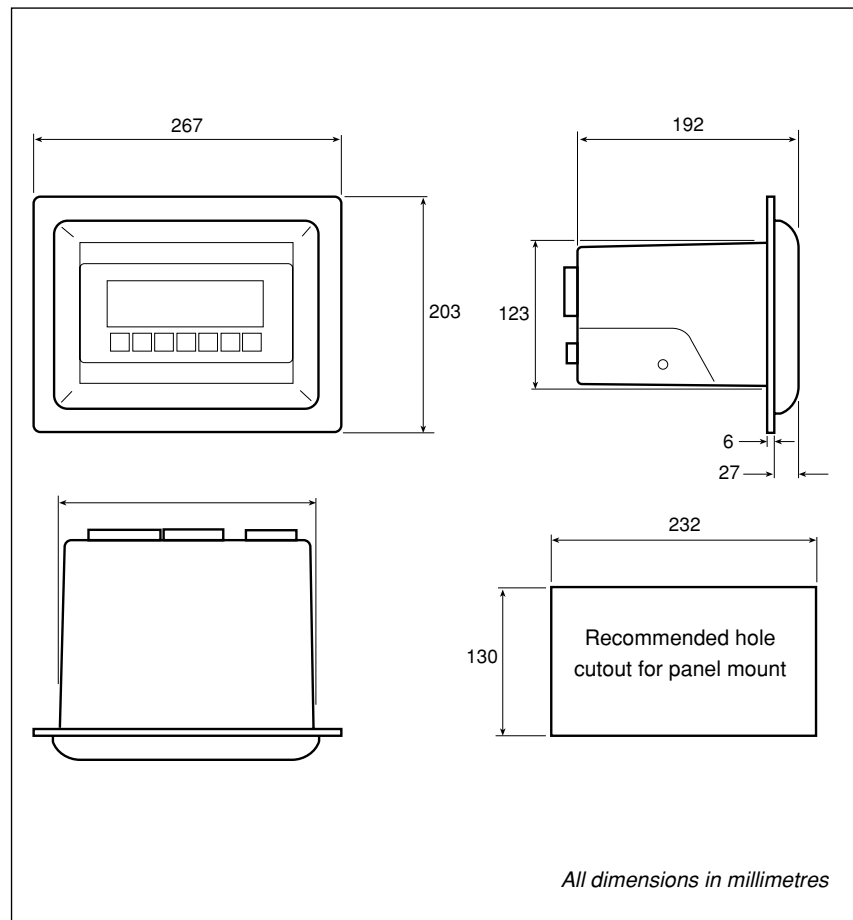

Weight

2.0 kg

Shipping Specification

Net

2.0 kg

Gross

2.9 kg

Measurement

275 mm x 305 mm x 265 mm

Harmonised Commodity Code

842390 00 0.

© Avery Berkel Limited 2004. All rights reserved. This publication is issued to provide outline information only which, unless agreed by Avery Berkel Limited in writing, may not be regarded as a representation relating to the products or services concerned. Avery Berkel Limited reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

Your local distributor:

Avery Weigh-Tronix

E mail: info@awtxglobal.com
Internet: <http://www.averyweigh-tronix.com>

Foundry Lane, Smethwick,
West Midlands, England B66 2LP.
Tel: +44 (0)870 90 34343 Fax: +44 (0)121-224 8183